Model 175: DIP Switch Settings to Change Print Formats

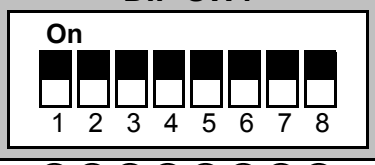

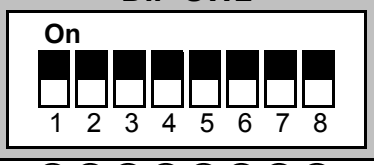

○:Off ●:On

Com: Comment, Mo: Month, DOW: Day of Week
Num: Sequential Number (see pg 10 of manual)

DIP SW1	DIP SW2	Print Example	Description
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 AM12:00	Mo, Day, Hr, Min
●②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	'94 JAN 31 AM12:00	Yr, Mo, Day, Hr, Min
●②③④●⑥⑦⑧	①②③④⑤⑥⑦⑧	31 JAN '94 AM12:00	Day, Mo, Yr, Hr, Min
●②③④⑤●⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 '94 AM12:00	Mo, Day, Yr, Hr, Min
●②③④●●⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 '94 AM12:00	Mo, Day, Yr, Hr, Min
①●③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	31 AM12:00	Day, Hr, Min
●●③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	Su 31 AM12:00	DOW, Day, Hr, Min
①②●④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	000000 31 AM12:00	Num, Day, Hr, Min
●②●④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	000 JAN 31 AM12:00	Num, Mo, Day, Hr, Min
①●●④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	000000 JAN 31 '94	Num, Mo, Day, Yr
①●●●⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	000000 31 JAN '94	Num, Day, Mo, Yr
①●●④●⑥⑦⑧	①②③④⑤⑥⑦⑧	000000 '94 JAN 31	Num, Yr, Mo, Day
①●●●●⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 '94 000000	Mo, Day, Yr, Num
①●●④⑤●⑦⑧	①②③④⑤⑥⑦⑧	31 JAN '94 000000	Day, Mo, Yr, Num
①●●●⑤●⑦⑧	①②③④⑤⑥⑦⑧	'94 JAN 31 000000	Yr, Mo, Day, Num
●●●④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	RCVD JAN 31 '94	Com, Mo, Day, Yr
●●●●⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	RCVD 31 JAN '94	Com, Day, Mo, Yr
●●●④●⑥⑦⑧	①②③④⑤⑥⑦⑧	RCVD '94 JAN 31	Com, Yr, Mo, Day
●●●●●⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 '94 RCVD	Mo, Day, Yr, Com
●●●④⑤●⑦⑧	①②③④⑤⑥⑦⑧	31 JAN '94 RCVD	Day, Mo, Yr, Com
●●●●⑤●⑦⑧	①②③④⑤⑥⑦⑧	'94 JAN 31 RCVD	Yr, Mo, Day, Com
●●●●●●⑦⑧	①②③④⑤⑥⑦⑧	RCVD 31 AM12:00	Com, Day, Hr, Min
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 AM12:00	Flush Left Print
①②③④⑤⑥●⑧	①②③④⑤⑥⑦⑧	ɹɐſ ʇ3 ∀M12:00	Flush Right Print
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧		Print by Card
①②③④⑤⑥⑦●	①②③④⑤⑥⑦⑧		Print by Pushbar
①②③④⑤⑥⑦⑧	●②③④⑤⑥⑦⑧		Print by Card & Pushbar
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 AM12:40	Hour / 60 Min
①②③④⑤⑥⑦⑧	①●③④⑤⑥⑦⑧	JAN 31 AM12.67	Hour / 100 Min
①②③④⑤⑥⑦⑧	①②●④⑤⑥⑦⑧	JAN 31 AM12.65	Hour / 20 Min
①②③④⑤⑥⑦⑧	①●●④⑤⑥⑦⑧	JAN 31 AM12.6	Hour / 10 Min
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 1 PM 3.00	Zero Disabled
①②③④⑤⑥⑦⑧	①②③●⑤⑥⑦⑧	JAN 01 PM 03.00	Zero Enabled
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 PM 3.00	AM / PM
①②③④⑤⑥⑦⑧	①②③④●⑥⑦⑧	JAN 31 15:00	24 Hours
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦⑧	JAN 31 AM12:00	English
①②③④⑤⑥⑦⑧	①②③④⑤●⑦⑧	ENE 31 AM12:00	Spanish
①②③④⑤⑥⑦⑧	①②③④⑤⑥●⑧	JAN 31 AM12:00	German
①②③④⑤⑥⑦⑧	①②③④⑤●●⑧	JAN 31 AM12:00	French
①②③④⑤⑥⑦⑧	①②③④⑤⑥⑦●	GEN 31 AM12:00	Italian
①②③④⑤⑥⑦⑧	①②③④⑤●⑦●	JAN 31 AM12:00	Portuguese
①②③④⑤⑥⑦⑧	①②③④⑤⑥●●	I 31 AM12:00	Roman
①②③④⑤⑥⑦⑧	①②③④⑤●●●	1 31 AM12:00	Numeric

The comment will change according to country selection by DIP switches 2-6, 7 & 8.

Clock Time (Hour) Must be Set in Military Time(1-24 Hr), Clock Display Will Always Show AM/PM Hrs & Mins Regardless of Print Format Selected

Downloaded from www.Manualslib.com manuals search engine